



FEATURES


- Stable long life. Low inductance.
- Can be produce according to customer's request.
- Compact type with safety design of non-flammability and insulation.
- Application aroma diffuser heater...

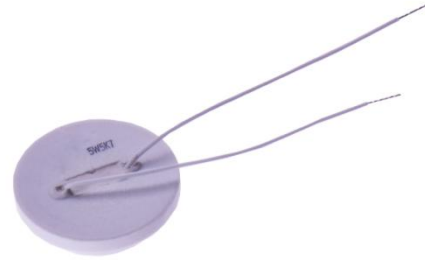


SQA-R TYPE

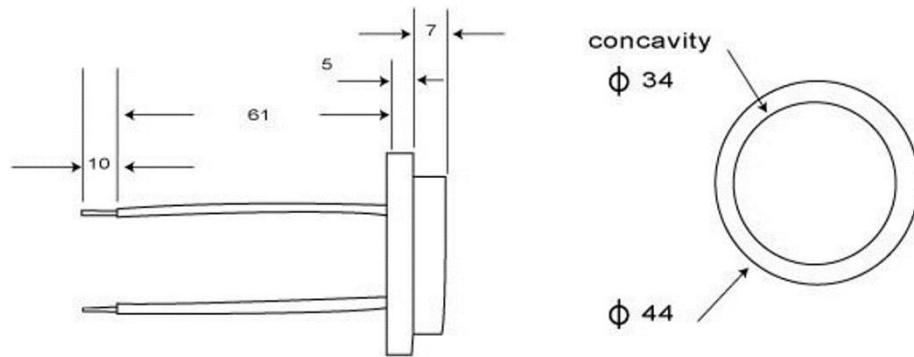


SQA-S TYPE

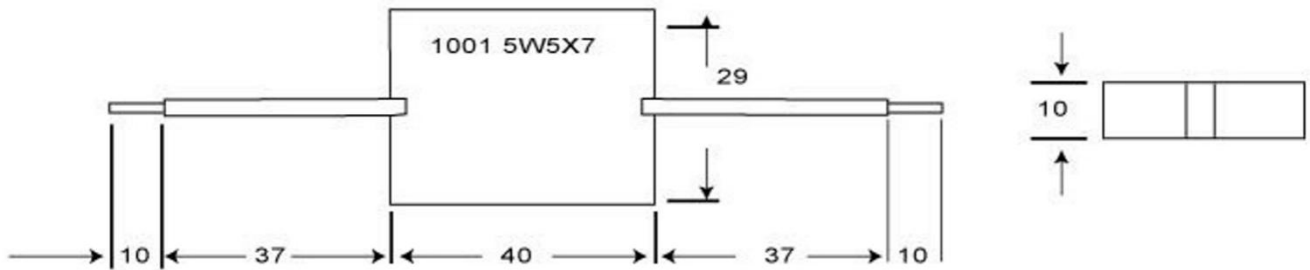

SQA-M TYPE
8W

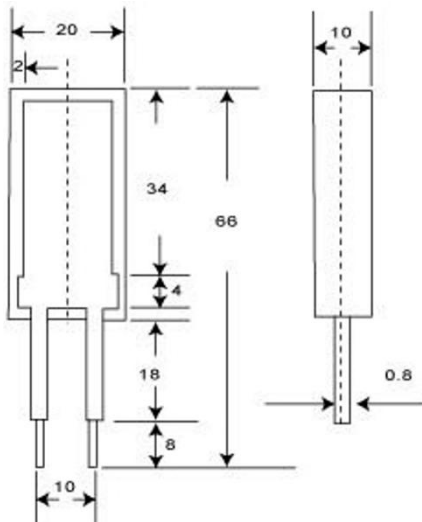


SQA-M TYPE
18W

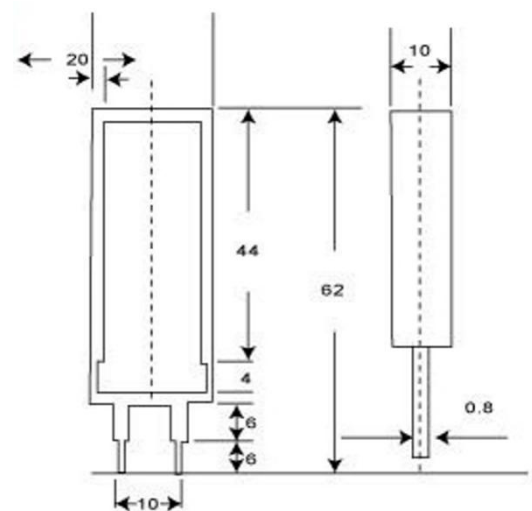

SPECIFICATIONS

ITEM	SPEC	REMARKS
Load life under high temperature	±5%	Rated voltage at 70°C for 1,000 hours
Load life under high humidity	±3%	56 days; 400C; 90 to 95% RH
Temp. Coeff. of resistance	R≤1W: ±600ppm/°C R>1W: ±350ppm/°C	Room temp.+100°C
Short time overload	±2%	10 times the rated power for 5 seconds
Temperature cycling	±1%	5 cycles for -55 ~ +155°C
Immersion in solder	±1%	350°C for 3 seconds
Insulation resistance	>100MΩ	500V (DC): 1 minute

CHARACTERISTICS

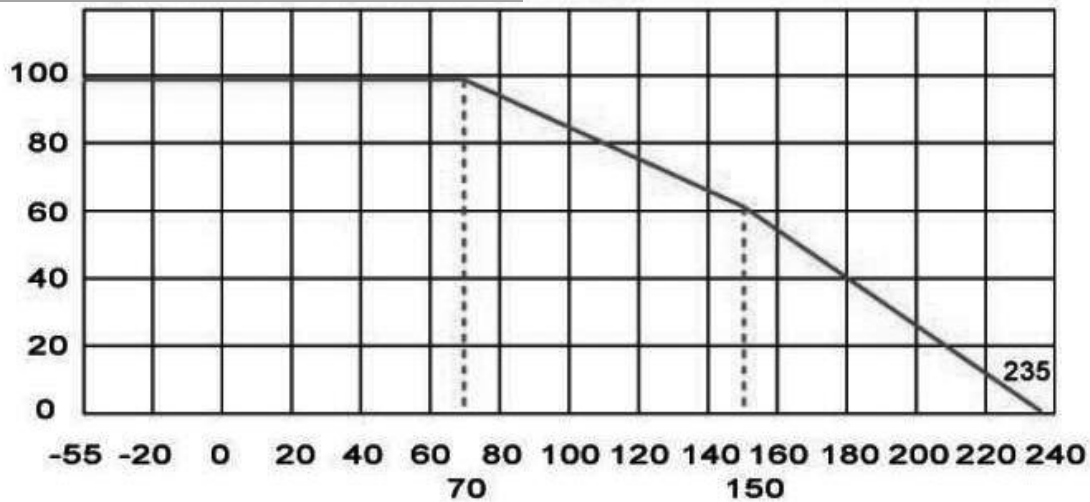

Note: Other resistance is available on request. WEET is capable of doing custom service for you.



WEE Technology Company Limited
FLAT/RM 705, 7/F,
FA YUEN COMM BLDG NO.75,
FA YUEN STREET, MONG KOK, KL, HK
www.weetcap.com
info@weetcap.com

All details in this data sheet are subject to change without notice.
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

